



SINCE
1950

TRADITIONAL QUALITY NONWOVENS


SORPTION CARPET
Nonwoven needle punched textile



STANDARD
100



PG035 217550
OETI

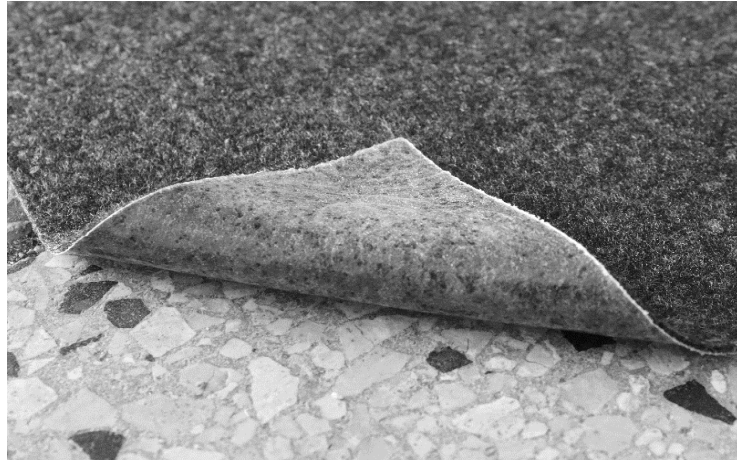

Characteristic: Nonwoven textile mechanically bonded by needle punching and laminated by transparent PE foil

Material content: 100 % Polypropylen staple fibers
PE foil, transparent, anti-slip, 20 - 25 g/m²*
EVA binder*

Color: Multicolor

Function: Sorption and trapping of drips, surface leakage of oil, lubricant or water.

Anti-slip finish.



OIL AND FATS
SORPTION



ANTI-SLIP

Use: Prevention of floor contamination



* Only for sorption carpet type PE

Material specification sheet

Date: 25. 3. 2023

Quality Management System ISO 9001, ISO 14001, ISO 45001 and ISO 50001



TRADITIONAL QUALITY NONWOVENS

SORPTION CARPET

Nonwoven needle punched textile

SORPTION CARPET	M	PE	
PHYSICAL PROPERTIES			
Weight / EN ISO 9864	g/m ²	250	300 ± 10 %
Thickness 0,1 kPa / EN ISO 9073-2	mm	1,7	2 ± 10 %
DIMENSIONS			
Delivered format	roll		roll
Width	cm	91	91 ± 1 cm
length	m	30 or 45	31 or 45
CHARACTERISTICS			
Description	Nonwoven textile mechanically bonded by needle punching and laminated by transperated anti-slip PE foil		
Material content	100% PP staple fibers		100% PP staple fibres
			PE anit-slip foil
			EVA powder
Surface finish of the reverse side	melting		PE anti-slip foil
Color	multicolour		multicolour
PACKAGING AND STORAGE			
Packaging	Rolls are packed in PE foil.		
Storage	In covered, clean and dry spaces		

The above technical parameters are average values and serve for general information. The manufacturer reserves the right to change it.