




TRADITIONAL QUALITY NONWOVENS

UNTEX VSS

Protective non-flammable textile

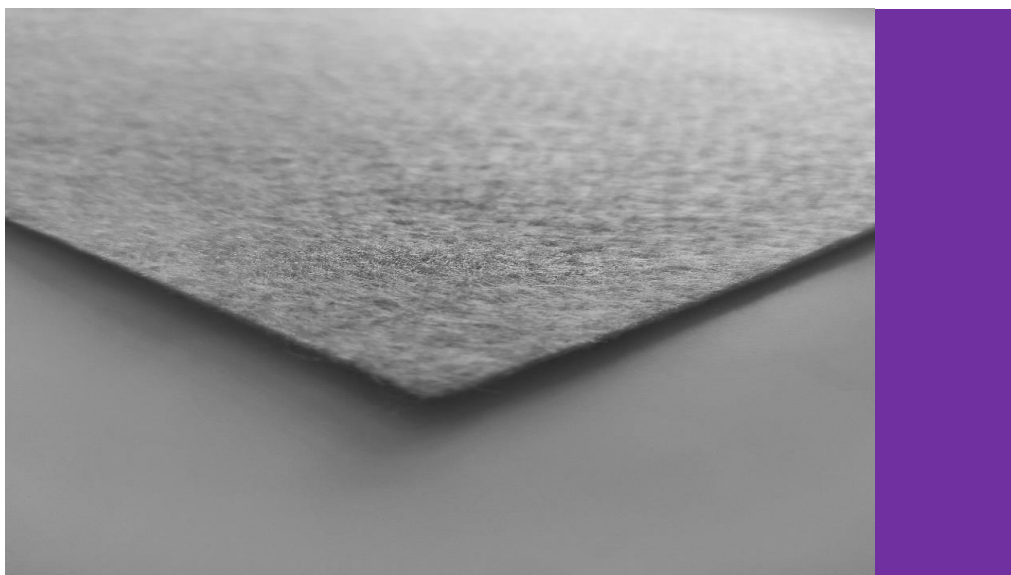

- Characteristic:** Needlepunched nonwoven protective non-flammable textile
- Material content:** 100% Viscose
- Color:** White
- Weight:** 200 - 400 g/m²
- Maximum width:** 6500 mm
- Standard length:** 50 m
- Regular use:** Protective textile for rolling stock seating , special clothing equipment and industrail using



Material specification sheet

Date: 15.3.2024

Quality Management System ISO 9001, ISO 14001, ISO 45001 a ISO 50001



SINCE
1950

TRADITIONAL QUALITY NONWOVENS

Material specification sheet

Date: 15.3.2024

UNTEX VSS

Protective non-flammable textile

Technical parameters

UNTEX VSS	200	400	
PHYSICAL PROPERTIES			
Weight [$\pm 10\%$] / EN 29073-1	g/m ²	200	400
Thickness [$\pm 10\%$] / ČSN EN ISO 9073 - 2	mm	3	4
FLAMMABILITY*			
ČSN EN 45545-2+A1	R21	HL3	HL3
DIMENSIONS, PACKAGING AND STORAGE			
Maximum width [m]	6,5	6,5	
Length [m]	50	50	
Packaging	Rolls are packed in PE foil, and wind up without paper tubes		
Storage	In covered, clean and dry spaces		

The above technical parameters are average values and serve for general information. The manufacturer reserves the right to change it.

* The following parameters were tested accredited by CZ Testing